

TACACS+

Embedded Tacacs+ Client Library




AuthAgent TACACS+ is a lean, embedded implementation of the Cisco Tacacs+ Protocol version 1.78 as specified in draft-grant-tacacs-02, draft RFC. It implements a client/server mechanism to carry authentication and authorization information between a network service granting privileges and a shared server that has the centralized user and node information required to decide whether such privileges should be granted. When used in conjunction with protocols that secure the network path, **AuthAgent TACACS+** provides a

powerful, yet simple mechanism to authenticate and authorize access to VPNs, dial-up concentrators, Ethernet switches and wireless networks.

The TACACS+ protocol specifies the information exchange between a device provides network access to users (the "Tacacs+ client") and a device that manages authentication information for those users (the "Tacacs+ server"). Having this separation of roles allows for centralized authentication and administration, which is especially

Features

- ❖ Cisco draft-RFC compliant
- ❖ Includes PAP, CHAP, MS-CHAP and ENABLE client APIs
- ❖ Dynamic Shutdown and Restart.
- ❖ Can be used standalone, or integrated with other security protocols.
- ❖ Support for multiple CPU types (x86, PowerPC, MIPS, ARM/Xscale)
- ❖ Royalty-free full source code distribution.

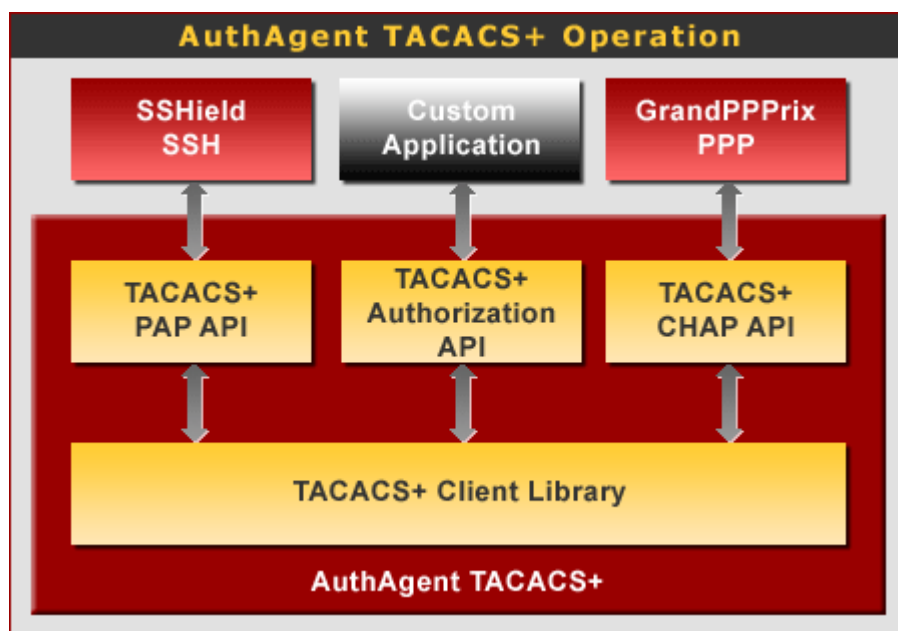

attractive to embedded devices that need to verify user credentials and authorize users, without having the overhead of maintaining and administering a database of sensitive user information. **AuthAgent TACACS+** provides a library to build customized Tacacs+ client applications, and facilitates this authentication on embedded devices.

TACACS+ Security

Security for the Tacacs+ information exchange is enabled by means of a pre-configured shared secret known only to the client application on the **AuthAgent TACACS+** side (configured using its APIs), and to the Tacacs+ server in use. All transactions between them are encrypted using this shared secret, which itself is never sent out over the network. **AuthAgent TACACS+** encrypts sensitive user data, such as passwords, with a stream derived from an MD-5 hash, so that only the two ends of a Tacacs+ link can decode them.

Special Features

- ❖ Robust interoperability-tested TACACS+ agent library.
- ❖ OS-independent and modular.
- ❖ Integrated into embedded devices with easy-to-use APIs.
- ❖ Supports multiple server configurations.

Challenge Response Support

Besides supporting password authentication (PAP) logins, **AuthAgent TACACS+** provides APIs to support challenge-response authentication. **AuthAgent TACACS+** supports both CHAP and MS-CHAP authentication.

Usage Scenarios

AuthAgent TACACS+ can be used standalone or as an add-on for **TeamF1**'s network security protocols included **SSHield**. It can also be combined with third-party security protocol implementations, allowing a common centralized back-end authentication server to hold and administer a user-directory that can be used across the board in an enterprise. Further, its made-for-

embedded design and dynamic shutdown and restart capabilities make it easy to use with a provisioning system.

Built for OS independence

AuthAgent TACACS+ is designed from the ground up to work with different operating systems including Linux® 2.4 based kernels, 2.6 based kernels, Green Hills INTEGRITY® and various versions of VxWorks®, including VxWorks-based Platforms such as Wind River® Platform for Network Equipment and others. It has been extensively tested across many CPU architectures and against several open source and Cisco TACACS+ servers. **AuthAgent TACACS+** uses TeamF1's AdaptOS library to abstract OS specific features.


Also Available

- ❖ **AuthAgent RADIUS**
RADIUS Authentication Agent
- ❖ **AuthAgent X.509**
Digital Certificate Authentication
- ❖ **AuthAgent Kerberos**
Kerberos V Authentication

Customization Flexibility

- ❖ Flexible APIs for configuring TACACS+ server settings including server name, retry count, timeouts and shared secrets on a serverspecific basis.
- ❖ Supports multiple TACACS+ servers.
- ❖ Can add new authentication methods.
- ❖ Supports all authorization methods through flexible API.
- ❖ Easily ported to new operating systems.
- ❖ Modular architecture allows for easy exclusion of unneeded functionality.

Example AuthAgent TACACS+ Usage Scenarios

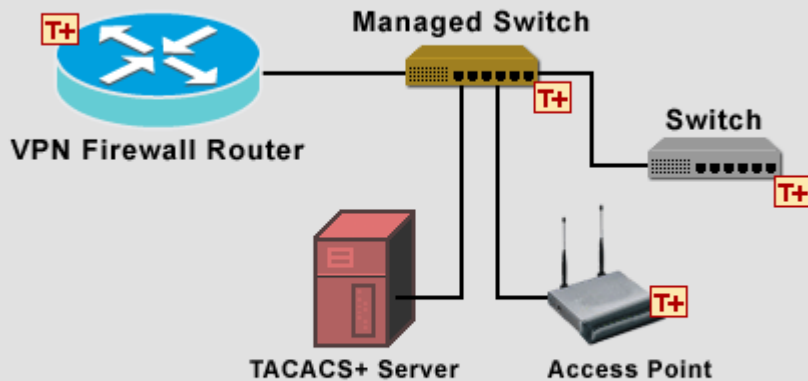

T+ AuthAgent TACACS+ enabled

Email: sales@TeamF1.com
Web: www.TeamF1.com
Ph: 510-505-9931 ext. 5
Fax: (510) 505-9941



© 2007-2008 TeamF1, Inc.